

Rework Adjustable Arm

Ref. RWT-B

Packing List

The following items should be included:

Tool Arm 1 unit

Flange 1 unit Ref. 0017524

Allen screw 1 unit Ref. 0017057







Flange Screw 3 u Ref. 0017548 **Flange Nut** 3 u Ref. 0892422 Flange Washer .. 3 u Ref. 0919480 **Allen key** 1 unit Ref. 0013609





0



Adapters 1 unit Ref. 0017058 (for JT-TA Heater)

0017058 (for J1-1A Heater) 0017059 (for TE-TB Precision Heater) **Manual** 1 unit Ref. 0020500









Features

Ideal for working with JBC's Hot Air stations and Preheaters.

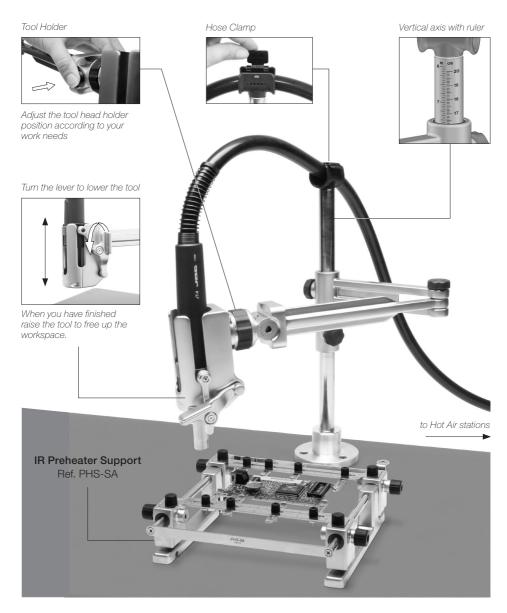


Assembly

1. Fixing the Flange




Fix the flange on your work table with the supplied screws, nuts and washers.

3. Inserting the Adapter (JT/TE)



Slide the adapter along the hose to the end of the handle.

2. Setting up the Tool Arm



Fit the tool arm onto the flange and tighten the allen screw.

4. Mounting the Tool



Insert the tool as far as possible.


5. Place the hose in the clamp





Height adjustment


- The RWT-B Arm allows adjustment for different heights according to your work needs through the vertical axis rule.
- Slide the tool holder to the appropriate height and secure by tightening the lower knob to guarantee stability. Make sure the upper knob is loosened before sliding the tool holder.



Work position adjustment

The RWB-B arm allows adjustment for different positions according to your work needs. The articulated arm covers all work areas.



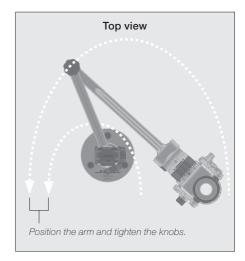

Tool Holder adjustment



The Tool Holder for Rework Arm allows you to adjust the tool head holder position to suit your work needs.

Press the button or loosen the wheel to move the ball joint.

Both axes have a ruler to carry out the task with higher precision .

Tilting movement:




By holding down the button you can rotate the Tool Holder up or down.



The movement allows a rotation of -40° to +40°.

Rotation movement:



You can lock or unlock the lateral rotation mechanism by turning the fixing wheel a quarter.



The movement allows a rotation of -90° a +90°.



Maintenance

- Check periodically that the RWT-B is clean, especially the sliding parts and the shaft.
- Use a damp cloth when cleaning. Alcohol can only be used to clean the metal parts.
- Replace any defective or damaged parts. Use original JBC spare parts only.
- Repairs should only be performed by a JBC authorized technical service.



Safety




It is imperative to follow safety guidelines to prevent electric shock, injury, fire or explosions.

- Do not use the equipment for any purpose other than PCB rework. Incorrect use may cause fire.
- The temperature of accessible surfaces may remain high after the unit is turned off. Handle with care.
- Be careful with the fumes produced when soldering.
- Keep your workplace clean and tidy. Wear appropriate protection glasses and gloves when working to avoid personal harm.
- Utmost care must be taken with liquid tin waste which can cause burns.
- This appliance can be used by children over the age of eight as well as persons with reduced physical, sensory or mental capabilities or lacking experience provided that they have been given adequate supervision or instruction concerning use of the appliance and understand the hazards involved. Children must not play with the appliance.
- Maintenance must not be carried out by children unless supervised.

Exploded View

RWT-BREWORK ADJUSTABLE ARM

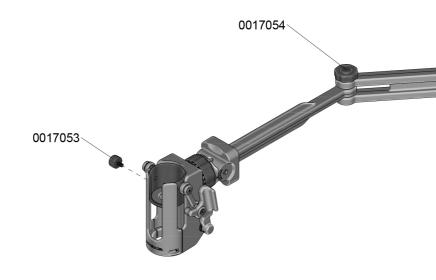




SPARE PARTS

RWT:

-TOOL HEIGH ADJ. KNOB: 0017053
-ROTATION ADJ. KNOB: 0017054
-HEIGHT ADJ. KNOB: 0017055
-HOSE CLAMP: 0017056
-SCREW: 0017057
-JT TOOL ADAPTER: 0017059

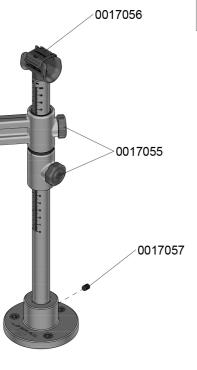





Notes	
	_
	_
	_
	_
	_
	_
	_
	_
	_
	_
	_
	_



Specifications

- Total weight: 4 kg (8.8 lb)

- Height: 386,5 mm (15.2 in)

- Arm lenght: 444,5 mm (17.5 in)

- ESD safe connector

Complies with CE standards ESD Safe



Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse. In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.

Register your warranty within 30 days of purchase in www.jbctools.com/productregistration



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of their life must be collected and returned to an authorized recycling facility.





Manual in other languages available on our website